

DESCRIPTION

Chlorinated enamel paint is based on chlorinated rubber polymers. It shows good weathering resistance good adhesion, high chemical stability. It is available in wide range of colors such as green, black, cement grey, red, scarlet, nutmeg, DB Grey, brown and some colors as per requests.


USAGE

Use as protective coating for any substrate.

APPLICATION

Apply two coats by roller or brush onto clean, dry and grease free surface. Low pressure or airless spray equipment can also be used.

MIXING RATIO *(Dilute with Slow Aromatic Solvent)*

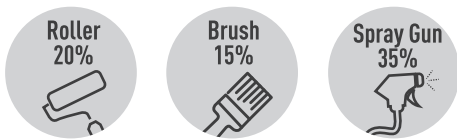

TECHNICAL DATA

Specific Gravity	~ 1.05
Viscosity	2000 - 3000 cP / 25 °C
Finish	Gloss
Coverage	~ 10 m ² / L
Packing	1 L, 5 L, 20 L

SURFACE PREPARATIONS

Wash surface with water under high pressure, let dry, and then apply two coats of CHLORINATED ENAMEL PAINT.

DRYING TIME

Approximately 1hr min to touch dry; can be over-coated after 4hrs approximately.

STORAGE

- Tightly closed container should be kept in a cool, dry place.
- Sealed product can be stored for over 1 year. Do not attempt to use the product past this time.

CLEANING

Use Aromatic Solvent.

SAFETY

- Ensure good ventilation during application and drying. Avoid eating, drinking and smoking while painting.
- In case of contact with eyes, wash with ample water and seek medical advice if necessary.
- Keep out of reach of children.
- Do not use empty containers to store food.
- Do not throw away in waterway.

DISCLAIMER

These recommendations are meant as a guide, no guarantee is implied since conditions of use, method of application and cleanliness of the substrate prior to painting are beyond our control.