

CHLORINATED ZINC PHOSPHATE PRIMER

DESCRIPTION

Fast Drying Chlorinated Rubber based primer, pigmented with rust inhibiting zinc phosphate pigments.


USAGE

- Anti corrosion primer suitable for interior and exterior steel works that are exposed to aggressive conditions.
- High resistant to marine environment.
- Good Abrasion Resistance
- Can be overcoated with conventional and chlorinated rubber topcoats.

APPLICATION

Apply 2 coats by roller or brush or spray onto suitably treated surface.

MIXING RATIO *(Dilute with Slow Aromatic Solvent)*

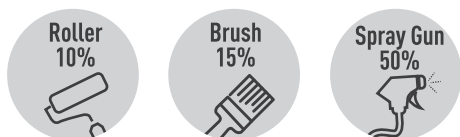

TECHNICAL DATA

Specific Gravity	~ 1.4
Volume Solids	~ 50%
Viscosity	1500 cP / 25 °C
Finish	Matt Grey
Coverage	~ 10 m ² / L
Packing	1 L, 5 L, 20 L

SURFACE PREPARATIONS

- Clean and degrease before applying primer.
- For new galvanized substrates, use Etch Primer before application of Chlorinated Primer.

DRYING TIME

Approximately 30 min to touch dry; can be over-coated after 1h approximately.

STORAGE

- Tightly closed container should be kept in a cool, dry place.
- Sealed product can be stored for over 1 year.

CLEANING

Use Slow Aromatic Solvent.

SAFETY

- Ensure good ventilation during application and drying. Avoid eating, drinking and smoking while painting.
- In case of contact with eyes, wash with ample water and seek medical advice if necessary.
- Keep out of reach of children.
- Do not use empty containers to store food.
- Do not throw away in waterway.

DISCLAIMER

These recommendations are meant as a guide, no guarantee is implied since conditions of use, method of application and cleanliness of the substrate prior to painting are beyond our control.