

# Polybois

# NITRO SANDING SEALER

## DESCRIPTION

Nitro cellulose based sealer having good sanding properties.


## USAGE

For use on wooden surfaces.

## APPLICATION

- Shake well before and during usage. Ideal application conditions between 12°C and 25°C, on a dry and non-windy weather.
- Sand down surface; then apply two coats by roller or brush onto clean, dry and grease-free surface.
- Sand surface after application of sealer to obtain a smooth finish.
- Milkiness that may be visible after application of sealer disappears after sanding or after application of varnish.

## MIXING RATIO *(Dilute with NC Thinner)*

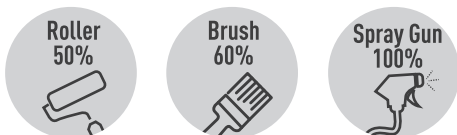

## TECHNICAL DATA

Specific Gravity	~ 0.90
Volume Solids	~ 20%
Viscosity	~ 3000 cP / 25°C
Finish	Matt
Coverage	~ 15m <sup>2</sup> per L
Packing	1 L, 5 L, 20 L

## SURFACE PREPARATIONS

Clean surface then apply two coats of Nitro Sanding Sealer. Sand between coats. Let dry then sand down with medium sanding paper.

## DRYING TIME

Approximately 30 minutes to touch dry. Sand after approximately 1 h.

## STORAGE

- Tightly closed container should be kept in a cool, dry place.
- Sealed product can be stored for over 1 year.

## CLEANING

Use NC Thinner.

## SAFETY

- Ensure good ventilation during application and drying. Avoid eating, drinking and smoking while painting.
- In case of contact with eyes, wash with ample water and seek medical advice if necessary.
- Keep out of reach of children.
- Do not use empty containers to store food.
- Do not throw away in waterway.

### DISCLAIMER

These recommendations are meant as a guide, no guarantee is implied since conditions of use, method of application and cleanliness of the substrate prior to painting are beyond our control.