

Polybois

DESCRIPTION

Alkyd resin based tinted and UV resistant varnish for wood. High gloss varnish. Good resistance to scratching, weathering and yellowing. Available in sapélé and miel doré.


USAGE

For use as decorative and protective coating on wooden surfaces. Interior and exterior use.

APPLICATION

Apply two coats by roller or brush onto clean, dry and grease free surface.

MIXING RATIO *(Dilute with Slow Aromatic / NC Thinner)*

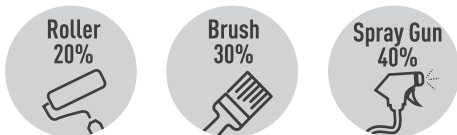

TECHNICAL DATA

Specific Gravity	~ 0.93
Volume Solids	~ 50%
Viscosity	1200 - 1500 cP / 25°C
Finish	Gloss
Coverage	~ 12m ² per L
Packing	1 L, 5 L, 20 L

POLYLASURE

SURFACE PREPARATIONS

Clean surface then apply two coats of **Nitro Sanding Sealer**. Sand in between coats. Let dry then sand down with medium sanding paper.

Apply two coats of **Polylasure**.

DRYING TIME

Dust dry	30 min approximately at 25°C
Touch dry	5 hours approximately at 25°C
Hard dry	24 hours approximately at 25°C

STORAGE

- Tightly closed container should be kept in a cool, dry place.
- Sealed product can be stored for over 1 year.

CLEANING

Use slow aromatics or NC Thinner.

SAFETY

- Ensure good ventilation during application and drying. Avoid eating, drinking and smoking while painting.
- In case of contact with eyes, wash with ample water and seek medical advice if necessary.
- Keep out of reach of children.
- Do not use empty containers to store food.
- Do not throw away in waterway.

DISCLAIMER

These recommendations are meant as a guide, no guarantee is implied since conditions of use, method of application and cleanliness of the substrate prior to painting are beyond our control.