

DESCRIPTION

Pure acrylic paint, having good opacity and coverage its resistance against fungus growth in humid areas and against Ultra Violet rays in hot/dry regions. White and colors as per POLYMATCH SYSTEM.


USAGE

Recommended for exterior use in humid regions.

APPLICATION

Apply two coats by roller or brush onto clean, dry and sealed surface.

MIXING RATIO *(Dilute with water)*

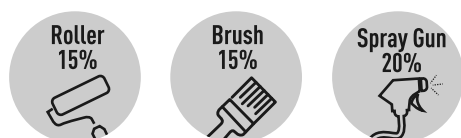

TECHNICAL DATA

Specific Gravity	~ 1.43
Opacity 120 µ wet	~ 97%
Volume Solids	~42%
Finish	Matt
Coverage	~ 12 m ² /L
Packing	1 L, 5 L, 20 L

CLEANING

Use water; however do not throw away in waterway.

SURFACE PREPARATIONS

- For concrete and plaster, wash surface with water under high pressure, let dry, then apply one thin coat of WALL PRIMER (<50 µm).
- If the old coating and/or its substrate have blisters or other defects, then old coating removal must be done by mechanical means or by stripping with Paint Remover. On powder old coatings, apply 1 coat CLEAR BINDER.

If substrate shows presence of fungi or algae, please proceed with the following surface preparations:

- Apply fungicidal wash by roller and leave to react for 12h minimum. Rinse with high pressure water again. Brush if necessary. Once dried, apply a coat of fungicidal treatment on the surface which will be coated the same day. Apply a thin coat of CLEAR BINDER where necessary and leave to dry for 3h minimum. Apply 2 coats of POLYTOP paint, leaving each coat to dry 3h minimum.

DRYING TIME

Approximately 1h to touch dry can be over-coated after approximately 4h.

STORAGE

Tightly closed container should be kept in a cool, dry place. Sealed product can be stored for over 2 year.

SAFETY

- Ensure good ventilation during application and drying. Avoid eating, drinking and smoking while painting.
- In case of insufficient ventilation, wear suitable respiratory equipment.
- In case of contact with eyes, wash with ample water and seek medical advice if necessary.
- Keep out of reach of children.
- Do not use empty containers to store food.
- Do not throw away in waterway.

DISCLAIMER

These recommendations are meant as a guide, no guarantee is implied since conditions of use, method of application and cleanliness of the substrate prior to painting are beyond our control.